

DS-2CE56D1T-IT1/IT3

HD1080P EXIR Turret Camera

TURBO HD

Incredible Full High Definition Images and 40 Metre IR Night Vision




EXIR



Key features

- HD1080P Video Output
- Adopt HDTV I Technology
- True Day/Night, Smart IR
- EXIR technology, 20/40m IR distance
- IP66 weatherproof
- OSD menu controlled via UTC

Dimensions

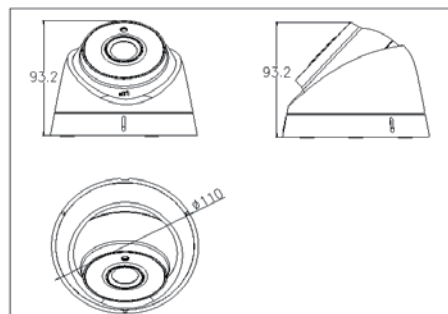

Accessories



Available models

DS-2CE56D1T-IT1
DS-2CE56D1T-IT3

	DS-2CE56D1T-IT1		DS-2CE56D1T-IT3	
Camera				
Image Sensor	2 MP CMOS Image Sensor			
Signal System	PAL / NTSC			
Effective Pixels	1930(H)*1088(V)			
Min. Illumination	0.01 Lux @(F1.2,AGC ON), 0 Lux with IR			
Shutter speed	1/25(1/30) s to 1/50,000 s			
Lens	2.8mm, 3.6mm, 6mm optional		3.6mm (6mm, 8mm, 12mm, 16mm optional)	
	Angle of View: 105.8°(2.8mm), 84.3°(3.6mm), 55.4°(6mm)		Angle of View: 84.3°(3.6mm), 55.4°(6mm), 38.7°(8mm), 24.8°(12mm), 19.2°(16mm)	
Lens Mount	M12			
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 75°, Rotation: 0 - 360°			
Day & Night	ICR			
Synchronization	Internal synchronization			
Video Frame Rate	1080p@25fps/1080p@30fps			
HD Video Output	1 Analog HD output			
S / N Ratio	More than 52dB			
Menu				
AGC	Support			
D/N Mode	Color/ BW/ EXT			
White Balance	Auto/ Manual			
BLC	Support			
Language	English/Chinese			
Function	Digital noise reduction, Mirror			
General				
Working Temperature / Humidity	-40 °C – 60 °C (-40 °F – 140 °F) Humidity 90% or less (non-condensing)			
Power Supply	12 VDC			
Power Consumption	Max. 2.5W		Max. 3.5W	
Weather Proof Ratings	IP66			
IR Range	Up to 20m		Up to 40m	
Communication	Up the coax Protocol: HIKVISION-C(Coaxitron)			
Dimensions	Φ 110 × 93.2 mm(Φ 4.33" × 3.67")			
Weight	260g (0.57 lb)			