


DS-2CE15C2P(N)-IR

720 TVL HIKVision DS-2CE15C29 PICADIS Outdoor IR Bullet Camera

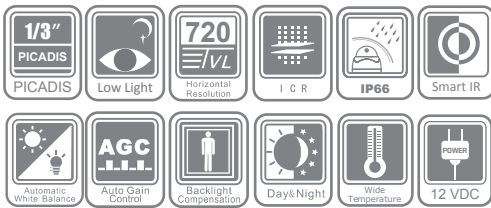


DS-2CE15C2P(N)-IR	
Camera	
Image Sensor	1/3" PICADIS
Signal System	PAL/NTSC
Effective Pixels	1280 (H) × 960 (V)
Min. Illumination	0.1 Lux @ (F1.2, AGC ON), 0 Lux with IR 0.3 Lux @ (F2.3, AGC ON), 0 Lux with IR
Shutter speed	PAL: 1/25 s to 1/10,000 s NTSC: 1/30 s to 1/10,000 s
Lens	3.6 mm @ F2.3 (6 mm optional)
	Angle of view: 73.1° (3.6 mm)
Lens Mount	M12
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360°
Day & Night	IR cut filter with auto switch
Horizontal Resolution	720 TVL
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 62 dB
General	
Working Temperature/Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 V DC ± 10%
Power Consumption	Max. 1.5 W (Max. 4.5 W with IR cut filter on)
Ingress Protection	IP66
IR Range	20 meters
Dimensions	Φ70×149.5 mm (Φ2.76"×5.89")
Weight	360 g (0.79 lbs)

Key features

- 1/3" PICADIS
- 720 TVL Horizontal Resolution
- True Day/Night
- 3.6/6mm Fixed Lens, 0.1 lux /F1.2
- 20m IR Distance
- Smart IR, high dynamic range
- Superior video image output and ultra low light illumination
- Wide operating temperature range
- IP66 Weatherproof

Dimensions

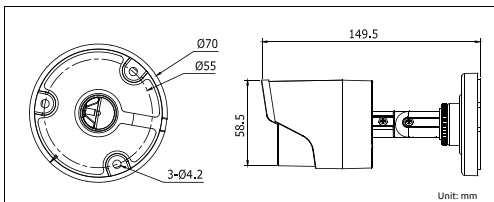

Available models

PAL : DS-2CE15C2P-IR, DS-2CE15C2P-IR (Grey)
NTSC : DS-2CE15C2N-IR, DS-2CE15C2N-IR (Grey)