G3-LITEKEYBOARD

3Axis Keyboard for CCTV PTZ Dome

General Features

- LCD Back light can display command menu
- Built In Multi Protocols
- Baud Rate can be selected
- Alarm Trigger
- Alarm Action can be set

Sample Images

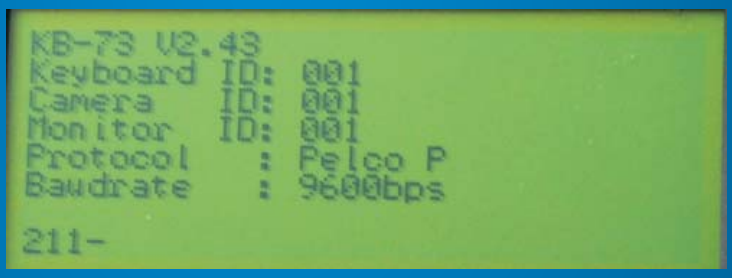

SPECIFICATION

Power Supply	< 9v-12v AC/DC
Power Consumption	5W
Type of Connection	6 Plugs & DB9 Electrical Outlet & RJ45
Type of Interface	RS485/422 & RS-232
Baud Rate	2400/4800/9600/19200 bps
Transmitting Distance	1200m V RS485 & RS422 ~ 0.5 Twisted Pair Cable
Temperature	-0°C - +50°C
Humidity	0-95%
Dimensions	378 * 160 * 98
Weight	1870g Approx

DIMENSIONS

For product improvements specifications are subject to change without notice.

ISO 9001 REGISTERED FIRM